



Design and user interface

- Elegant and uncluttered design.
- Capacitive keyboard and wide graphical display.
- LED lighting of the white cell for a maximum visibility of the displayed products.



Maximum flexibility

- Swing is available as a Slave model to
- Up to 7 trays which can be easily moved thanks to Vertical Flex (V-Flex) system.
- Space optimization inside the cell.
- With two optional Visioshop trays it is possible to create a special area for products with non standard packaging, such as salads and ready to go meals.
- Enhanced ETL trays.
- Wider delivery bin.



High energy efficiency

- C class according to EN 50597 scale.
- Perfect insulation of the cabinet.
- Cooling unit with R290 gas.
- High energy efficiency and dramatic decrease of pull down time.
- Swing can manage up to three temperatures inside the cell or can be set with a 100% Food or Ambient layouts.



Electronics

- Swing is compatible with Newis solutions.
- With Breasy it is possible to select and pay for your product in a completely touchless mode.
- With AmiClo it is possible to set up the machine remotely.



An elegant and uncluttered design





High visibility cell

Energy consumption labels


Swing Range



Swing is available as a Slave model to  

Features

| | |
|--------|------------|
| Height | 1830 mm |
| Width | 900 mm |
| Depth | 790 mm |
| Weight | 300 kg ca. |

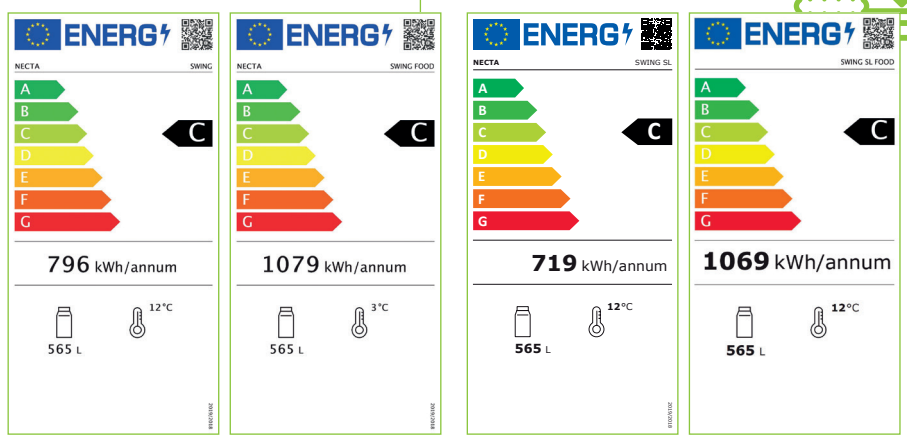

necta.evocagroup.com



EVOCA SPA
Via Roma 24, 24030 Valbrembo (BG) Italia
Tel. +39 035 606111 - Fax +39 035 606519

